

WHIRL-A-WAY

125 BAR1400

USER MANUAL

V1.0 2026

INTRODUCTION



Attention: Read through the complete manual prior to the initial use of your Whirl-A-Way

Using the Operator's manual

The operating manual is an important part of your Whirl-A-Way. It should be read thoroughly before initial use and referred to often to make sure adequate safety and service concerns are being addressed.

Reading the owner's manual thoroughly will help avoid personal injury or damage to your pump. The information in this manual will offer you the most effective tools for cleaning as well as the safest. By knowing how best to operate this machine you will be better positioned to show others who may also operate the unit.

This manual contains information for the complete range of BE Whirl-A- Ways, and is placed in order starting from the safety requirements to the operating functions of your pump. You can refer back to the manual at any time to help troubleshoot any specific operating functions, so store it with the machine at all times.

PRODUCTION IDENTIFICATION

Record Identification Numbers

Whirl-A-Way

If you need to contact an Authorized Dealer or Customer Service line please call 02 4577 2144 (Australia) or 07 849 0000 (New Zealand) for information on servicing and make sure to always provide the product model and identification numbers.

You will need to locate the model and serial number for the pump and record the information in the places provided below.

Date of Purchase:
Dealer Name:
Dealer Phone:

Product Identification Numbers
Model Number:
Serial Number:

PRE - OPERATING INSTRUCTIONS

Pre-Operating Instructions Before You Begin
Prior to initial operation of the unit carefully read the information outlined in the operation instructions.

- Ensure that all components are in good working order and that they operate safely.
- Do not use cleaner if any part is not in proper working condition.
- No modifications permitted on the machine.
- Before operation test the cleaner at low pressure (1500 PSI) to ensure you can operate safely at high pressures.



WARNING
This product uses extreme water pressure and water force. This may cause kickback when using the cleaner.

The surface cleaning system you have purchased connects directly to a 1/4" quick connect coupler, operating to a maximum of 4,000 PSI.
This Whirl-A-Way is designed to operate with cold water pressure cleaners. We do not recommend the use of hot water as the nylon brush skirt will soften and wear prematurely, voiding any warranty.

Before operation ensure that the pressure cleaner is on low pressure when first using the Whirl-A-Way. Adjust pressure with adjustable unloader.

Intended Use
The Whirl-A-Way is suitable for cleaning floors and walls in conjunction with a high pressure cleaner.

(A) Recommend Operating pressure: 2,000-3,600 PSI
(B) Maximum pressure: 4,000 PSI
(C) Maximum water temperature: 85°C/180°F

- Never exceed maximum operating pressure and temperature.

Care
- Protect from frost/ freezing.
- Ensure bristles are not deformed during storage.

Please dispose of packaging environmentally responsibly
The packaging materials are recyclable. Please do not throw the packaging in the household rubbish but take it to a recycling centre.

OPERATING

- Never reach under the unit while the high-pressure cleaner is operating
- Never direct the Whirl-A-Way at humans or animals.
- Do not operate on a ladder.



WARNING
Nozzle has been set according to factory set alignment.

During operation, should you experience a buildup of small stones or other foreign material within the cover, we recommend that you simply tip the cleaner on its side at 45° which should expel any foreign materials. This extend the life of your tips and swivel arm. The tips that have been installed on your surface cleaning system permit the use of your cleaner with a pressure washer producing up to 11.4 L/min at 4,000 PSI.


This unit will not spin efficiently with pressure under 8.7 L/min. Periodically check the tips to ensure they are not plugged by dirt particles. It is very important when operating your 14" Whirl-A-Way, that you maintain a continuous motion.
Should you leave the cleaner in a stationary position, the surface being cleaned can be seriously damaged by the high pressure.

Recommended Applications use with a gun and lance
Connect to lance using q/c fittings on the lance and 14" Whirl-A-Way.

Attach to long wand
Attach to a longwand for cleaning hard to reach surfaces. Connect to longwand using the QC fittings on the longwand and 14" Whirl-A-Way.

For 15.1 L/min, use #020 nozzle
For 11.4 L/min, use #015 nozzle

PARTS DIAGRAM AND LIST

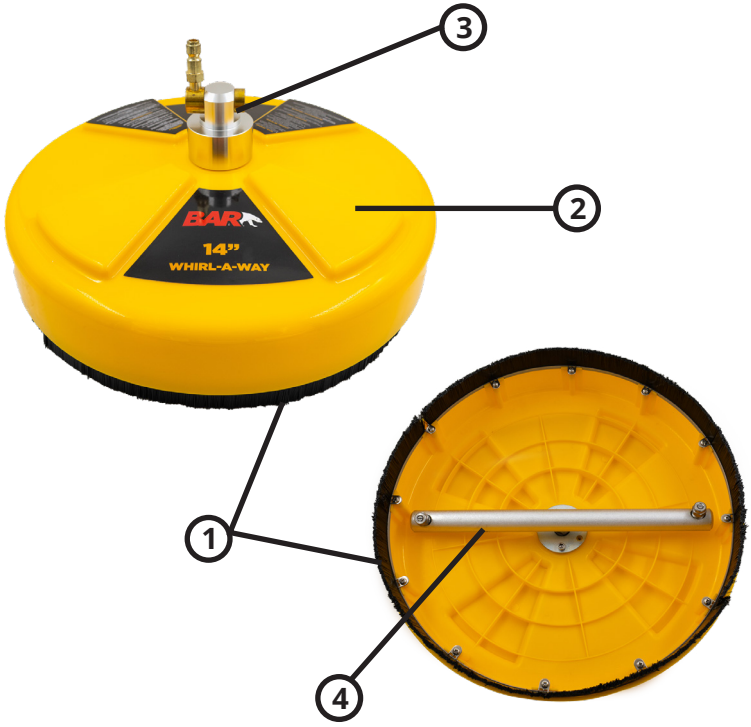

NO#	DESCRIPTION
1	Durable Nylon Brush Skirt
2	Heavy Duty Polypropylene Cover
3	4,000PSI Rotary Head, 180°F
4	Rotary Arm

WARRANTY

The rotary head has a six-month warranty from the date of purchase. Should you encounter problems with the rotary head within that time period, contact the place of purchase for RGA and return with authorized RGA. If you encounter problems after the six month period has lapsed, a rotary head repair kit is available. You can use this kit to replace the components inside the rotary head very quickly.

There is no warranty on the nylon brush ring.

All other components of the surface cleaning system have a 30-day replacement warranty against manufacturer's defects only.

DISTRIBUTED IN AUSTRALIA BY



B.A.R Group P/L
15 Hudson Place,
Mulgrave, NSW, Australia 2756
Phone: 02 4577 2144
www.bargroup.au

DISTRIBUTED IN NEW ZEALAND BY



BE Pressure Supply
541D Te Rapa Road, Te Rapa,
Hamilton 3200, New Zealand
Phone: 07 849 0000
www.bepressure.co.nz

Errors and omissions excepted.
Specifications and performance may change.