



# LB SERIES SLIMLINE AUTOMATIC 240 V SUBMERSIBLE PUMP



SINGLE PHASE SUBMERSIBLE PUMP · 250 L/MIN · 11 M HEAD

124 LB-480A

BARCODE: 9346472031007




The LB/LB-A series are submersible single-phase portable drainage pumps. The discharge direction is selectable between vertical and inclined to prevent folding or bending of the discharge hose. Every LB-series is slim design enough to be accommodated in an 8-inch pipe. The LB-A series with an innovative electrode-type relay unit automatically starts and stops the pump to eliminate dry-running.

## FEATURES

- Automatic start/stop.
- Anti wicking cable offers maximum protection against water penetrating through the cable entry should the cable be damaged extending the life of your pump.
- 50 mm discharge direction that is selectable between vertical or inclined.
- Thermal motor protector
- Dual mechanical seals with silicon carbide face provides 5 times higher corrosion wear and heat resistance than tungsten carbide.
- Tsurumi original design oil lifter prolonging seal life

## SPECIFICATIONS

- **Maximum Flow:** 250 L/min
- **Max Head:** 11 m
- **Motor Type:** 240 V - 0.48 kW
- **Discharge Bore:** 2"
- **Impeller Type:** Semi-vortex urethane rubber
- **Starting Method:** Capacitor run
- **Solids Passage:** 6 mm
- **Cable Length:** 10 m
- **Dimensions:** 189 mm W x 286 mm

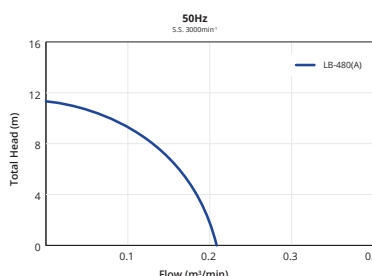

Part #	Type	Motor Type	Head	Discharge Size	Flow	Pump Weight:
124 LB-480	Manual	240 V - 0.48 kW	11 m	50 mm	0.25 m³/min (250 L/min)	10.4 kg
124 LB-480A	Automatic	240 V - 0.48 kW	11 m	50 mm	0.25 m³/min (250 L/min)	11 kg

## RELATED PRODUCTS



124 LB-480

LB SLIMLINE  
SERIES



124 HS2.4S

HS MANUAL  
SERIES



124 HSZ2.4S

HSZ 240 V  
AUTOMATIC  
SERIES



124 LSC1.4S

LSC PUDDLE  
SUCKER SERIES



124 KTVE21.5

KTVE AUTOMATIC  
415 V SERIES