


NEW TWIN BOILER HOT WATER MACHINE

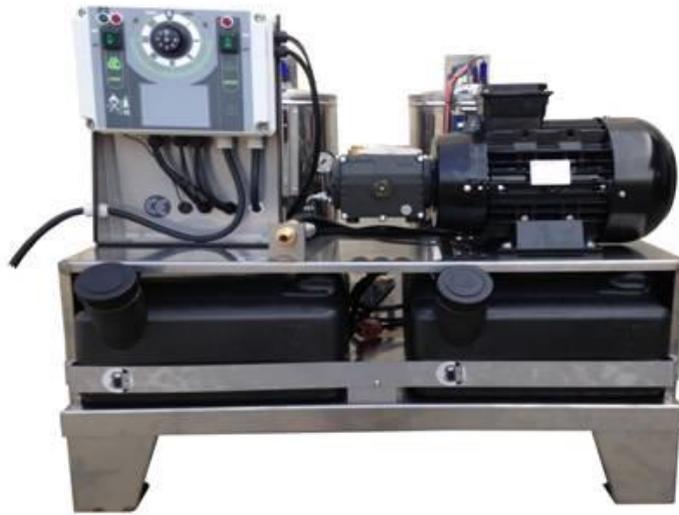

MODELS: 200/30

OR 180/41

- ✓ TWIN BURNER UNIT
- ✓ 90° DEGREES HEAT FULL FLOW
- ✓ STAINLESS STEEL FRAME
- ✓ INTERPUMP
- ✓ NICOLINI MOTOR WITH JOINT & FLANGE
- ✓ HOSE, GUN & LANCE
- ✓ AUTO TST
- ✓ NEW HE BOILERS X2
- ✓ TWO X 31 LT FUEL TANKS
- ✓ 24 V SAFETY CONTROLS
- ✓ WHEEL OPTIONS
- ✓ FLAME FAILURE SYSTEM

SPECIFICATIONS FOR 180/41 TWIN BURNER UNIT :

TECHNICAL SPECIFICATIONS	
PRESSURE	180 BAR
FLOW RATE	41 LT/M
PUMP	W2141 RIGHT
FRAME	STAINLESS STEEL FRAME WITHOUT COVER
MOTOR	15KW 20HP 400/690-50Hz M160 MOTOR WITH JOINT AND FLANGE COUPLING
BOILER	TWO COMPLETE HIGH EFFICIENCY BOILER (AVANT XL BOILER) WITH 34MT COIL
BYPASS VALVE	BYPASS VB85/280
SHUTDOWN SYSTEM	TOTAL STOP (TST), ELECTRONIC BOARD WITH PHOTOCCELL
SAFETY VALVE	VS 220 SAFETY VALVE AND MIDY SAFETY VALVE
ACCESSORIES	CM. 120 LANCE, PROFESSIONAL GUN RL30, 10MT HP HOSE
PACKAGED DIMENSIONS	DIM. CM. 130X130X130 H
WEIGHT	TOTAL NET WEIGHT KG. 200,000 – TOTAL GROSS WEIGHT KG. 220,000

Optional: Low pressure Chemical System with **KIM JET and regulating head** to put on the lance **OR**



Low pressure Chemical System with **Foam lance** complete with tank (Lt. 1)