




BRACCIO RIGIDO DOPPIO - ATTACCO a SOFFITTO
RIGID DOUBLE BOOM - CEILING MOUNT



Pressione Nominale (B) / (B) Rated Pressure	4 MPa	580 psi
Pressione Ammissibile (B) / (B) Permissible Pressure	4.5 MPa	655 psi
Pressione Nominale (A) / (A) Rated Pressure	19 MPa	2750 psi
Pressione Ammissibile (A) / (A) Permissible Pressure	21 MPa	3100 psi
Flusso Nominale / Rated Flow	45 l/min	12 U.S. gal/min
Temperatura Nominale / Rated Temperature	120 °C	250 °F



Note / Notes Quote in mm/ Dimensions in mm

Codice Part No.	Entrata Inlet	Uscita Outlet	Lunghezza Length		Massa Weight		Icona
			mm	in	kg	oz	
1211000107	2 x G 1/4 F	2 x G 1/4 M	A 1600 + 1750	B 63 + 69	23	811.3	1
1211000207	2 x G 1/4 F	2 x G 1/4 M	A 1750 + 2000	B 69 + 79	24	846.6	1
1211000108	2 x G 1/4 F	2 x G 3/8 M	A 1600 + 1750	B 63 + 69	23	811.3	1
1211000208	2 x G 1/4 F	2 x G 3/8 M	A 1750 + 2000	B 69 + 79	24	846.6	1


Materiale / Material Copertura in Acciaio (AISI 430) / Steel Cover (AISI 430)
Tubo in Acciaio Inox (AISI 304) / Stainless Steel Pipe (AISI 304)




PROLUNGA per BRACCI SINGOLI/DOPPI a SOFFITTO - ATTACCO a MURO
BOOM EXTENSION for SINGLE/DOUBLE CEILING BOOMS - WALL MOUNT



Pressione Nominale / Rated Pressure	19 MPa	2750 psi
Pressione Ammissibile / Permissible Pressure	21 MPa	3100 psi
Flusso Nominale / Rated Flow	45 l/min	12 U.S. gal/min
Temperatura Nominale / Rated Temperature	120 °C	250 °F



Codice Part No.	Entrata Inlet	Uscita Outlet	Lunghezza Length		Tipo Type	Massa Weight		Icona
			mm	in		kg	oz	
1215010111	G 1/4 M	G 1/4 M	3000	118	A	35	1234.6	1
1215010211	2 x G 1/4 M	2 x G 1/4 M	3000	118	B	38	1340.4	1

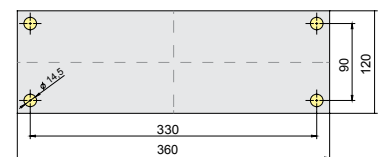

Note / Notes Quote in mm/ Dimensions in mm

Materiale / Material Copertura in Acciaio (AISI 304) / Steel Cover (AISI 304)
Tubo in Gomma tipo R1 Compatto / Compact R1 type Rubber Hose

Note / Notes Schema di Montaggio ved. MOD H pag. 245 / Mounting pattern see MOD H pag. 245