

## NICOLINI MOTOR ELASTIC JOINT

SKU: 165 T413311/NR1J5KG

Motor: Three Phase

Power: 11 kW


Pole Configuration: 4-pole

Voltage: 415/720 V

Frequency: 50 Hz


IEC Frame Size: 132

Mounting Type: Double Flange

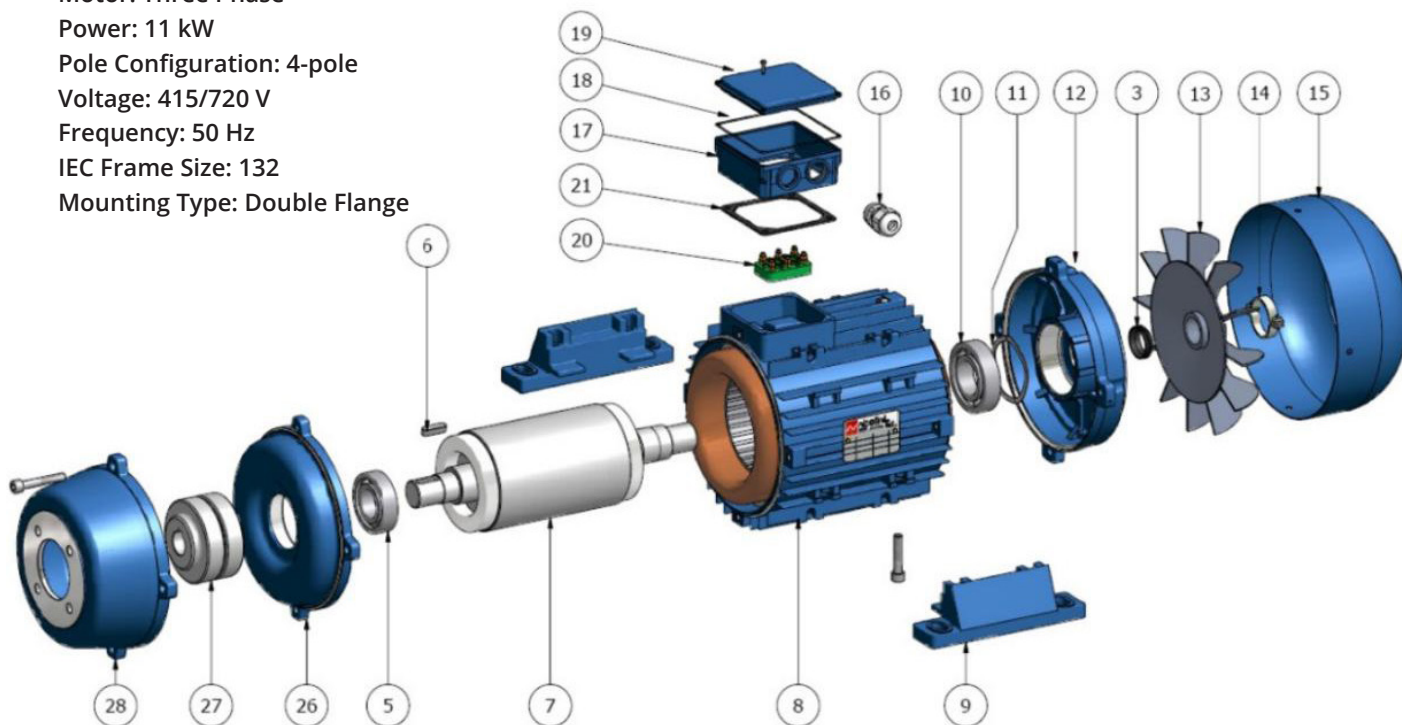

| REF #   | PART #            | DESCRIPTION            |
|---------|-------------------|------------------------|
| 28      | 165 01FAL132BSIR1 | External Flange 132    |
| 26      | 165 01FAL132BNIC1 | Internal Flange 132    |
| 27      | 165 06GIUNTOLAV13 | Elastic Coupling 132   |
| 21      | 165 04GUA081BASE1 | Seal                   |
| 9       | 165 01PIEDE133002 | Feet 132               |
| 3       | 165 04ANVR0400001 | Seal Ring              |
| 13 & 14 | 165 04VEN132PPL01 | Fan & Ring 132         |
| 15      | 165 04CV132VNER01 | Fan Cover 132          |
| *       | 165 04CB132ANP217 | Terminal Box Aluminium |

|                                            |               |                       |    |
|--------------------------------------------|---------------|-----------------------|----|
| <b>nicolini &amp;c.</b><br>ELECTRIC MOTORS |               | UK<br>CA              | CE |
| Mot. 3 ~                                   | Tipo RN132LC4 | IP 55                 |    |
| KW. 11                                     | HP. 15        | S.3 70%               |    |
| R.P.M. 1430                                |               |                       |    |
| Volt. 415                                  | Volt. 720     | Hz. 50                |    |
| Amp. 23,1                                  | Amp. 13,3     | Cos. φ 0,85           |    |
| Is. Cl. F                                  | Rend. % 80    | μF.                   |    |
| Mat. N. 250825107                          |               | www.nicolinimotori.it |    |
| IEC EN60034                                |               | Made in Italy         |    |

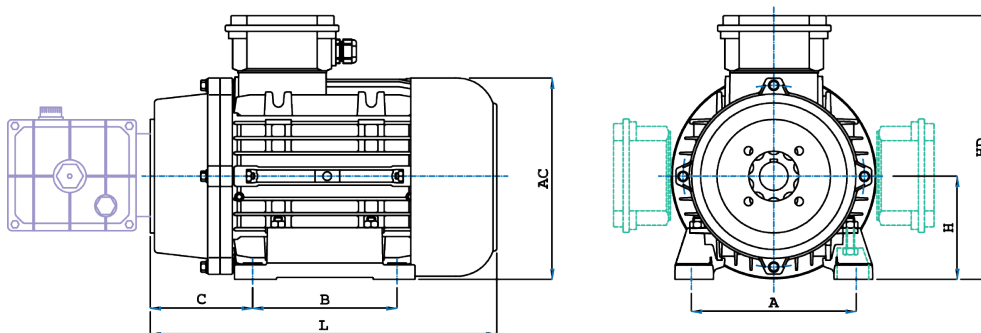

### DIMENSIONS

| A      | B      | C      | L      | H      | AC     | HD     |
|--------|--------|--------|--------|--------|--------|--------|
| 216 mm | 140 mm | 120 mm | 400 mm | 132 mm | 266 mm | 324 mm |